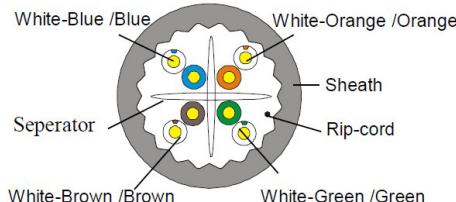


Cat6A - UTP - SOLID - LSZH

Category	U/UTP CAT6A-4P-LSZH																																																																																																																																													
Reference	ISO/IEC 11801 TIA-568-C.2																																																																																																																																													
CPR Classification	Eca																																																																																																																																													
Material	Solid - 100% copper	<table><tr><th colspan="5">Technical performance (100m):</th></tr><tr><th>Frequency (Mhz)</th><th>RL ≥dB</th><th>ATT ≤dB</th><th>NEXT ≥dB</th><th>DELAY ≤ns</th></tr><tr><td>1</td><td>20.0</td><td>2.1</td><td>74.3</td><td>570.0</td></tr><tr><td>4.0</td><td>23.0</td><td>3.8</td><td>65.3</td><td>552.0</td></tr><tr><td>8.0</td><td>24.5</td><td>5.3</td><td>60.8</td><td>546.7</td></tr><tr><td>10.0</td><td>25.0</td><td>5.9</td><td>59.3</td><td>545.4</td></tr><tr><td>16.0</td><td>25.0</td><td>7.5</td><td>56.2</td><td>543.0</td></tr><tr><td>20.0</td><td>25.0</td><td>8.4</td><td>54.8</td><td>542.1</td></tr><tr><td>25.0</td><td>24.3</td><td>9.4</td><td>53.3</td><td>541.2</td></tr><tr><td>31.25</td><td>23.6</td><td>10.5</td><td>51.9</td><td>540.4</td></tr><tr><td>62.5</td><td>21.5</td><td>15.0</td><td>47.4</td><td>538.6</td></tr><tr><td>100</td><td>20.1</td><td>19.1</td><td>44.3</td><td>537.6</td></tr><tr><td>200</td><td>18.0</td><td>27.6</td><td>39.8</td><td>536.5</td></tr><tr><td>250</td><td>17.3</td><td>31.1</td><td>38.3</td><td>536.3</td></tr><tr><td>300</td><td>16.8</td><td>34.3</td><td>37.1</td><td>536.1</td></tr><tr><td>500</td><td>15.2</td><td>45.3</td><td>33.8</td><td>535.6</td></tr></table> <table><tr><th>Frequency (Mhz)</th><th>PSNEXT ≥dB</th><th>ELFEXT ≤dB</th><th>PSELFEXT ≥dB</th></tr><tr><td>1</td><td>72.3</td><td>67.8</td><td>64.8</td></tr><tr><td>4.0</td><td>63.3</td><td>55.8</td><td>52.8</td></tr><tr><td>8.0</td><td>58.8</td><td>49.7</td><td>46.7</td></tr><tr><td>10.0</td><td>57.3</td><td>47.8</td><td>44.8</td></tr><tr><td>16.0</td><td>54.2</td><td>43.7</td><td>40.7</td></tr><tr><td>20.0</td><td>52.8</td><td>41.8</td><td>38.8</td></tr><tr><td>25.0</td><td>51.3</td><td>39.8</td><td>36.8</td></tr><tr><td>31.25</td><td>49.9</td><td>37.9</td><td>34.9</td></tr><tr><td>62.5</td><td>45.4</td><td>31.9</td><td>28.9</td></tr><tr><td>100</td><td>42.3</td><td>27.8</td><td>24.8</td></tr><tr><td>200</td><td>37.8</td><td>21.8</td><td>18.8</td></tr><tr><td>250</td><td>36.3</td><td>19.8</td><td>16.8</td></tr><tr><td>300</td><td>35.1</td><td>18.3</td><td>15.3</td></tr><tr><td>500</td><td>31.8</td><td>13.8</td><td>10.8</td></tr></table>	Technical performance (100m):					Frequency (Mhz)	RL ≥dB	ATT ≤dB	NEXT ≥dB	DELAY ≤ns	1	20.0	2.1	74.3	570.0	4.0	23.0	3.8	65.3	552.0	8.0	24.5	5.3	60.8	546.7	10.0	25.0	5.9	59.3	545.4	16.0	25.0	7.5	56.2	543.0	20.0	25.0	8.4	54.8	542.1	25.0	24.3	9.4	53.3	541.2	31.25	23.6	10.5	51.9	540.4	62.5	21.5	15.0	47.4	538.6	100	20.1	19.1	44.3	537.6	200	18.0	27.6	39.8	536.5	250	17.3	31.1	38.3	536.3	300	16.8	34.3	37.1	536.1	500	15.2	45.3	33.8	535.6	Frequency (Mhz)	PSNEXT ≥dB	ELFEXT ≤dB	PSELFEXT ≥dB	1	72.3	67.8	64.8	4.0	63.3	55.8	52.8	8.0	58.8	49.7	46.7	10.0	57.3	47.8	44.8	16.0	54.2	43.7	40.7	20.0	52.8	41.8	38.8	25.0	51.3	39.8	36.8	31.25	49.9	37.9	34.9	62.5	45.4	31.9	28.9	100	42.3	27.8	24.8	200	37.8	21.8	18.8	250	36.3	19.8	16.8	300	35.1	18.3	15.3	500	31.8	13.8	10.8
Technical performance (100m):																																																																																																																																														
Frequency (Mhz)	RL ≥dB		ATT ≤dB	NEXT ≥dB	DELAY ≤ns																																																																																																																																									
1	20.0		2.1	74.3	570.0																																																																																																																																									
4.0	23.0		3.8	65.3	552.0																																																																																																																																									
8.0	24.5		5.3	60.8	546.7																																																																																																																																									
10.0	25.0		5.9	59.3	545.4																																																																																																																																									
16.0	25.0		7.5	56.2	543.0																																																																																																																																									
20.0	25.0		8.4	54.8	542.1																																																																																																																																									
25.0	24.3		9.4	53.3	541.2																																																																																																																																									
31.25	23.6		10.5	51.9	540.4																																																																																																																																									
62.5	21.5		15.0	47.4	538.6																																																																																																																																									
100	20.1		19.1	44.3	537.6																																																																																																																																									
200	18.0		27.6	39.8	536.5																																																																																																																																									
250	17.3		31.1	38.3	536.3																																																																																																																																									
300	16.8		34.3	37.1	536.1																																																																																																																																									
500	15.2		45.3	33.8	535.6																																																																																																																																									
Frequency (Mhz)	PSNEXT ≥dB		ELFEXT ≤dB	PSELFEXT ≥dB																																																																																																																																										
1	72.3		67.8	64.8																																																																																																																																										
4.0	63.3	55.8	52.8																																																																																																																																											
8.0	58.8	49.7	46.7																																																																																																																																											
10.0	57.3	47.8	44.8																																																																																																																																											
16.0	54.2	43.7	40.7																																																																																																																																											
20.0	52.8	41.8	38.8																																																																																																																																											
25.0	51.3	39.8	36.8																																																																																																																																											
31.25	49.9	37.9	34.9																																																																																																																																											
62.5	45.4	31.9	28.9																																																																																																																																											
100	42.3	27.8	24.8																																																																																																																																											
200	37.8	21.8	18.8																																																																																																																																											
250	36.3	19.8	16.8																																																																																																																																											
300	35.1	18.3	15.3																																																																																																																																											
500	31.8	13.8	10.8																																																																																																																																											
Shielding class	UTP																																																																																																																																													
AWG	23																																																																																																																																													
Diameter cable	7,1 mm																																																																																																																																													
Length	100m																																																																																																																																													
Transfer frequency	500.0 MHz																																																																																																																																													
Bending radius	8x Diameter cable																																																																																																																																													
Tensile Strength (Mpa)	≥ 10.0																																																																																																																																													
Type of cable sheathing	LSZH																																																																																																																																													
Color	Blue																																																																																																																																													
Core color	1 - White-Blue/ Blue																																																																																																																																													
	2 - White-Orange/ Orange																																																																																																																																													
	3 - White-Green/ Green																																																																																																																																													
	4 - White-Brown/ Brown																																																																																																																																													
Rip-cord	Yes																																																																																																																																													
Packing	Pull box																																																																																																																																													