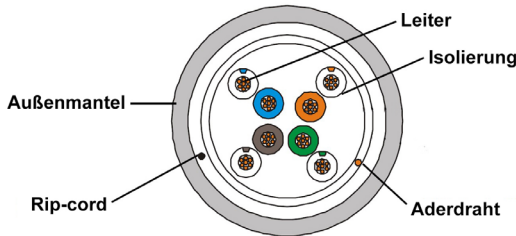


## Cat5e - FTP - FLEXIBEL - PVC

Kategorie	PATCH F/UTP CAT5E-4P-PVC																																																								
Referenz	ISO/IEC 11801 TIA-568-C.2																																																								
CPR Klasse	Fca																																																								
Kern	Flexibel - 100% Kupfer																																																								
Schirmung	FTP	<b>Technische Leistung (&lt;30m):</b> <table><tr><th>Frequenz (Mhz)</th><th>RL ≥dB</th><th>ATT ≤dB</th><th>NEXT ≥dB</th><th>DELAY ≤ns</th></tr><tr><td>1</td><td>19.0</td><td>3.0</td><td>60.0</td><td>521</td></tr><tr><td>4.0</td><td>19.0</td><td>3.9</td><td>54.8</td><td>504</td></tr><tr><td>8.0</td><td>19.0</td><td>5.5</td><td>50.0</td><td>500</td></tr><tr><td>10.0</td><td>19.0</td><td>6.2</td><td>48.5</td><td>498</td></tr><tr><td>16.0</td><td>19.0</td><td>7.9</td><td>45.2</td><td>496</td></tr><tr><td>20.0</td><td>19.0</td><td>8.9</td><td>43.7</td><td>495</td></tr><tr><td>25.0</td><td>18.0</td><td>10.0</td><td>42.1</td><td>495</td></tr><tr><td>31.25</td><td>17.1</td><td>11.2</td><td>40.5</td><td>494</td></tr><tr><td>62.5</td><td>14.1</td><td>16.2</td><td>35.7</td><td>492</td></tr><tr><td>100</td><td>12.0</td><td>21.0</td><td>32.3</td><td>491</td></tr></table>	Frequenz (Mhz)	RL ≥dB	ATT ≤dB	NEXT ≥dB	DELAY ≤ns	1	19.0	3.0	60.0	521	4.0	19.0	3.9	54.8	504	8.0	19.0	5.5	50.0	500	10.0	19.0	6.2	48.5	498	16.0	19.0	7.9	45.2	496	20.0	19.0	8.9	43.7	495	25.0	18.0	10.0	42.1	495	31.25	17.1	11.2	40.5	494	62.5	14.1	16.2	35.7	492	100	12.0	21.0	32.3	491
Frequenz (Mhz)	RL ≥dB		ATT ≤dB	NEXT ≥dB	DELAY ≤ns																																																				
1	19.0		3.0	60.0	521																																																				
4.0	19.0		3.9	54.8	504																																																				
8.0	19.0		5.5	50.0	500																																																				
10.0	19.0		6.2	48.5	498																																																				
16.0	19.0		7.9	45.2	496																																																				
20.0	19.0		8.9	43.7	495																																																				
25.0	18.0		10.0	42.1	495																																																				
31.25	17.1		11.2	40.5	494																																																				
62.5	14.1	16.2	35.7	492																																																					
100	12.0	21.0	32.3	491																																																					
AWG	26																																																								
Durchmesser Kabel	6 mm																																																								
Länge	305m																																																								
Bandbreite	100.0 MHz																																																								
Biegeradius	8x Durchmesser Kabel																																																								
Maximale Ziehkraft (Mpa)	≥ 10																																																								
Material Außenmantel	PVC																																																								
Farbe Außenmantel	Grau																																																								
Aderfarben	1 - Blau/ Weiß-Bau																																																								
	2 - Orange/ Weiß-Orange																																																								
	3 - Grün/ Weiß-Grün																																																								
	4 - Braun/ Weiß-Braun																																																								
Rip-cord	Integriert																																																								
Verpackung	Abrollkarton																																																								